

GROUND ANCHORING FOR TENNIS COURT COVERS

Over the last six years, the well proven Duckbill mechanical ground anchors have been successfully used to anchor a number of tennis court covers for Europe's leading manufacturer of relocatable structures, The Walter Group of Brumath, France.

The cost-effective Duckbill anchors provide a fast, efficient and reliable means of securing the structures and preventing any wind uplift.

Garrison Tennis Club, Strasbourg, France (right and above)


Structure: 36m span covering two courts

Ground: Sands and clays

Anchors: MR1's, 3m long with 20mm high yield bar

Quantity: 32

Load requirements: 80kN

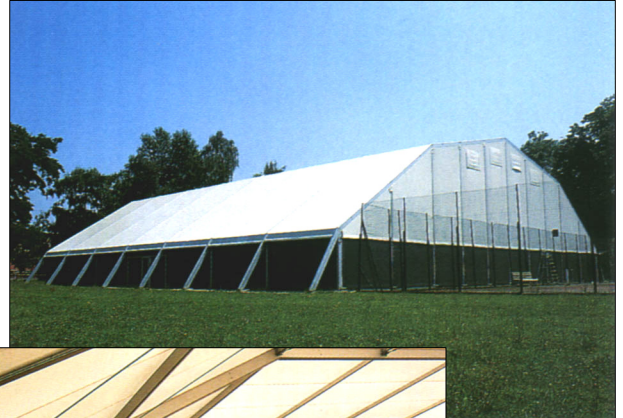

St Trojean Tennis Club, Ile d'Oreron, France (above)

Structure: 18m span over one court

Ground: Sand

Anchors: MR1's at the four corners; MR2's on the intermediate legs all 3m long with 16mm high yield bars

Quantity: 16

Load requirements: MR1's - 80kN; MR2's - 40kN



Tennis court, Sourdeval, France (above and left)

Structure: 18m span over one court

Ground conditions: Stiff clay to gravels

Anchors: MR2's, 3m long with 16mm high yield bars

Quantity: 16

Load requirements: 40kN

Installation at all sites was quick, simple and effective, undertaken by WT Anchor Systems using a hand-held hydraulic breaker.